


# 380 Swisslon Classic™

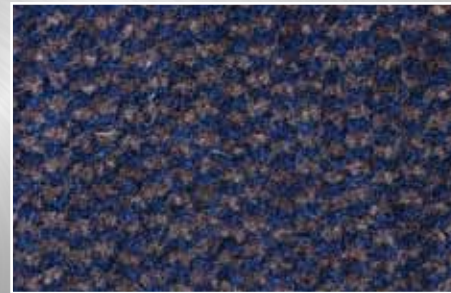

- Premium quality barrier matting, designed to remove walked-in moisture and finer dirt particles in large indoor entrance areas, including wall-to-wall applications. Our classic barrier mat is well known for its soft yarns that offer excellent cleaning and absorbing while the duo-colour grit pattern provides outstanding dirt-hiding characteristics.
- Great ability to retain moisture (>5 litres per m<sup>2</sup>) and scrape debris from foot traffic while maintaining its great looking appearance for the longest time. A dense heavyweight vinyl backing ensures longevity.
- Suitable for heavy traffic conditions.
- For placement as loose lay mat, in recess frames (depth 7 mm) or wall to wall installations in larger entrances at hotels, public buildings, schools, universities, hospitals, department stores, banks, restaurants.

# 380 Swisslon Classic™

PRODUCT SPECIFICATIONS		
Designation	Dust Control Matting	
Description	Absorbent carpet mat	
Material		
	Top	Densely tufted cut loop pile (85.500 tufts per m <sup>2</sup> ) consisting of 100% polyamide yarns 950 grams of yarn per m <sup>2</sup>
	Backing	Black vinyl (DOP free)
Process	Tufted	
Category	Indoor absorbent - Contract	
Recommended use	Indoor - heavy traffic conditions	
Colours	Blue, Blue-Grey, Charcoal	
Weight	3.8 kg/m <sup>2</sup>	
Thickness	9,4 mm	
Standard sizes	90 cm x 150 cm 120 cm x 180 cm 100 cm x 20 m 130 cm x 20 m 200 cm x 20 m	
Custom sizes	100 cm, 130 cm and 200 cm per linear meter	
Special remarks		
PRODUCT TESTING		
Tests	Norms	Results
Abrasion resistance	ASTM D3884	
Colour fastness to light	AATCC 16E	5
Accelerated wear test by sim floor machine	U.S.	
Accelerated soiling	U.S.	
Anti-slip	DIN51130 BGR181	
Water retention	U.S.	5 l/m <sup>2</sup>
Sanitary epidemiologic test	GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV	Pass - Certificate no. 77.01.16.229.P.044984.07.09
Graves tear strength		
Hardness		
Elongation		
FIRE TESTING		
	Surface Flammability	ASTM D2859
	Russian fire retardancy test	
	Classification of the reaction to fire performance	ISO EN 9239 Bfl - S1
Sustainability	<ul style="list-style-type: none"> <li>• Recyclable material</li> <li>• REACH compliant ( Registration, Evaluation, Authorization and restrictions of Chemicals)</li> <li>• Contributes to cleaner environment by reducing need of cleaning chemicals</li> </ul>	